


IMPORTANT SAFETY INSTRUCTIONS INSTALLATION

PREPARING THE LUMINAIRE

SAVE THESE INSTRUCTIONS

- WARNING** - Before starting the installation, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.
- If you are replacing an existing luminaire, disconnect and remove the old luminaire. Run the supply electrical wires through the Electrical Junction Box (by others) as shown in figure below.
- Make electrical connections: Connect grounding wire (green or bare copper) from the supply circuit to the green or bare copper wire from the luminaire. Connect the white wire(s) from the luminaire to the white wire of the supply circuit. Connect the black wire(s) from the luminaire to the black wire of the supply circuit. Use U.L. Listed wire connectors (by others). Secure wire connectors with U.L. Listed electrical tape (by others).
- Place the Surface Back Plate onto the Mounting Surface allowing the Wood Screws (by others) to pass through the holes, then fasten the Plate as shown in figure below.
- Replace the Ballast Cover using the four Machine Screws as shown in figure below.
- Install the lamp(s) (by others) **Do Not Exceed Recommended Wattage**.
- Install Lamp Enclosure with the four Mounting Screws (provided) as shown in figure below.

IMPORTANT: In order to comply with established electrical code, the installer must seal the area around the Surface Back Plate and the Wall, with type of caulking compound such as GE 100% or Dow Corning 100% silicone to provide a watertight seal in accordance with the differing surface textures of the wall

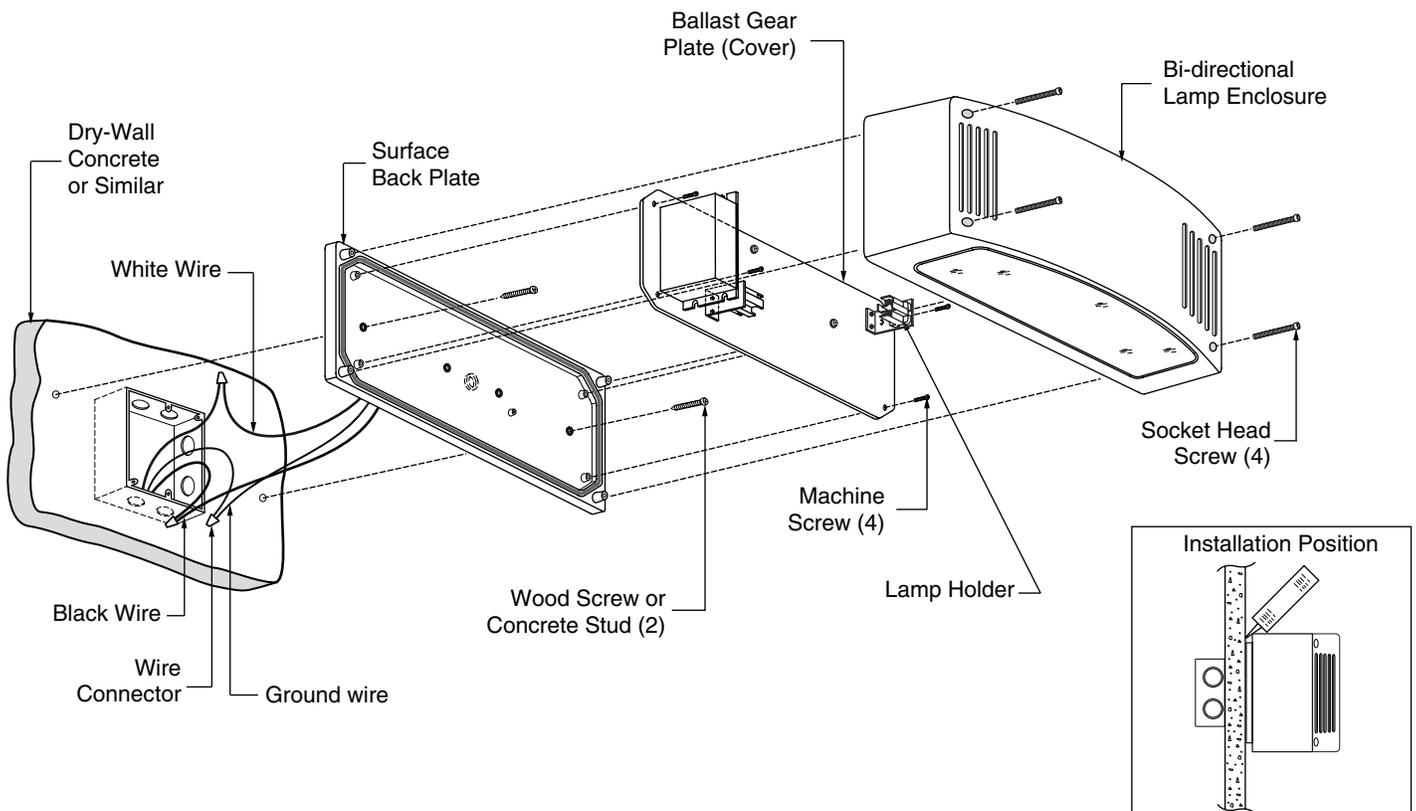

SURFACE LUMINAIRE - WALL MOUNT UD500 -

LUMUX - ARCHITECTURAL LIGHTING COMPANY - Toll Free 877- 895-5552 www.Lumux.net