

# LUMUX

Date :

Project :

Type:

Agency :

Distributor :



**Description :** This NEW designed bollards are technically and decoratively developed with a high protection particularly in corrosive and environmental conditions. Body component are fabricated from low copper die cast aluminum alloy. This unit is geared with Thermal Shock Resistant toughened safety glass lens. You could specify this unit with 1 watt or 3 watt LED with integral power supply (120 volt or 277 volt) for ease of installation and maintenance. Anchor bolts are provided with the unit. This unit is utilizing a (3) watt LED with its integral 120 or 277 volt driver. Unit could be specified in Black, Sliver, White or Dark Bronze polyester powder coat. ETL listed for wet location.

**SPECIFICATION:**


**Housing :** Low copper aluminium die cast.

**Diffuser :** Clear Glass.

**Electrical :** Voltage : 120 or 277  
 Lamp: 1 watt or 3 watt LED  
 Driver : Integral, class P, Electronic Driver

**Installation:**  
 Unit is provided with anchor bolts.

**DIMENSIONS:**

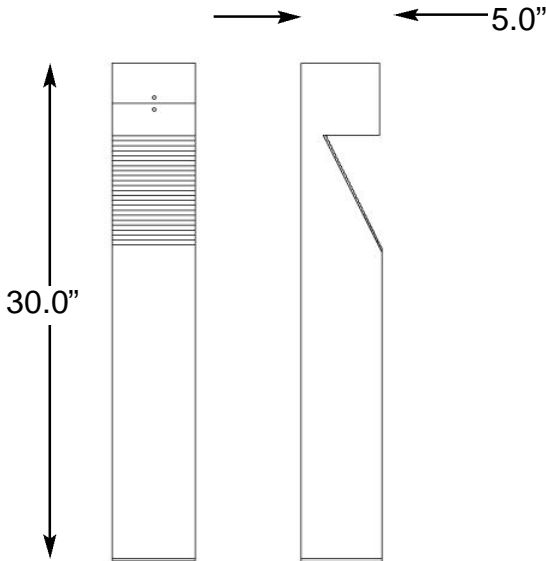

Lumux - BL201

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev : A	Drawing Number BL201
--------------------	--------------	---------	-------------------------

# LUMUX

Date :

Project :

Type:

Agency :

Distributor :

## ORDERING GUIDE:

---

BL201 / XXX / XXX / xxx

1 watt  
or 3  
watt  
LED \*

120  
277

White  
Black  
Silver  
Bronze  
RAL  
(optional)

\* The LED Light source comes with its integral driver @ 120 volt or 277 volt.

Lumux - BL201

## PROJECT NOTES:

---

### Comments

### Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev :A

Drawing Number  
BL201