

LUMUX

Date :

Project :

Type:

Agency :

Distributor :



Description :
 Walk-over round recessed in-ground luminaries(with grills only). Aluminum die cast body and cover. Unit could be field modified from one illumination opening to four illumination openings. 1/8" thick domed molded clear tempered glass. Stainless Steel vandal resistance fastener. Unit is fully gasketed for weather tight operation. ETL listed for wet location.

SPECIFICATION:


Housing : Low copper aluminum die cast.
 Vandal resistance stainless steel screws.
 Silicon gasketed for weather tight operation.

Diffuser : Glass

Electrical : Voltage : 120 / 277
 Lamp: Compact Fluorescent, HID
 Socket : G24Q. Med. Base.
 Ballast : Class P, Electronic Ballast

Installation:
 unit in provided with its own rough-in polymer box with the opening of 8 1/8" in diameter by 12.0' in length.

DIMENSIONS:

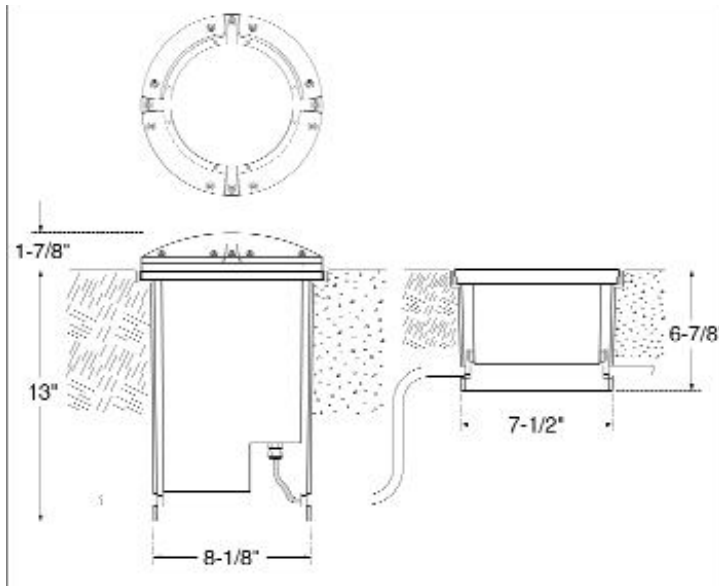

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux - PL200

Lumux Lighting Inc	877-895-5552	Rev : B	Drawing Number PL200 .lumux.com
--------------------	--------------	---------	------------------------------------

LUMUX

Date :

Project :

Type:

Agency :

Distributor :

ORDERING GUIDE:

PL200 / XXX / XXX / xxx / option

PL42
MH50
MH70
MH100
MH150

120
277

White
Black
Silver
Bronze
RAL
(optional)

FV (Full View. No
Guard)
Quartz Restrike.

Lumux - PL200

PROJECT NOTES:

Comments

Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev :B

Drawing Number
PL200