

Date :

Project :

Type:

Agency :

Distributor :



**Description :** Architecturally designed step light for low mounting application. This angeled louver unit is fabricat-ed from grade 316 stainless steel. Silicon gasketed for weather tight application with stainless steel Allen type head screws. Unit is utilizing LED or G4 lamp as its light source. LED light source comes with its integral 120 or 277 volt input voltage driver. This unit is ETL listed for outdoor application.

**SPECIFICATION:**


**Housing :**Grade 316 stainless steel. Vandal resistance stainless steel screws. Silicon gas-keted for weather tight operation.

**Diffuser :** Frosty glass.

**Electrical :** Voltage : 120 or 277  
Lamp: .G4, 12 volt, LED.  
Socket : Mini Bi Pin.  
LED is provided with its own 120 or 277 volt driver.

**Installation:** Unit is provided with its own rough-in box with (2) 1/2" knock-outs. The dimensions are 4.0" x 4.0"x4.0". The center of the two knock-outs are 1.0" from the bottom of the rough-in box.

**DIMENSIONS:**

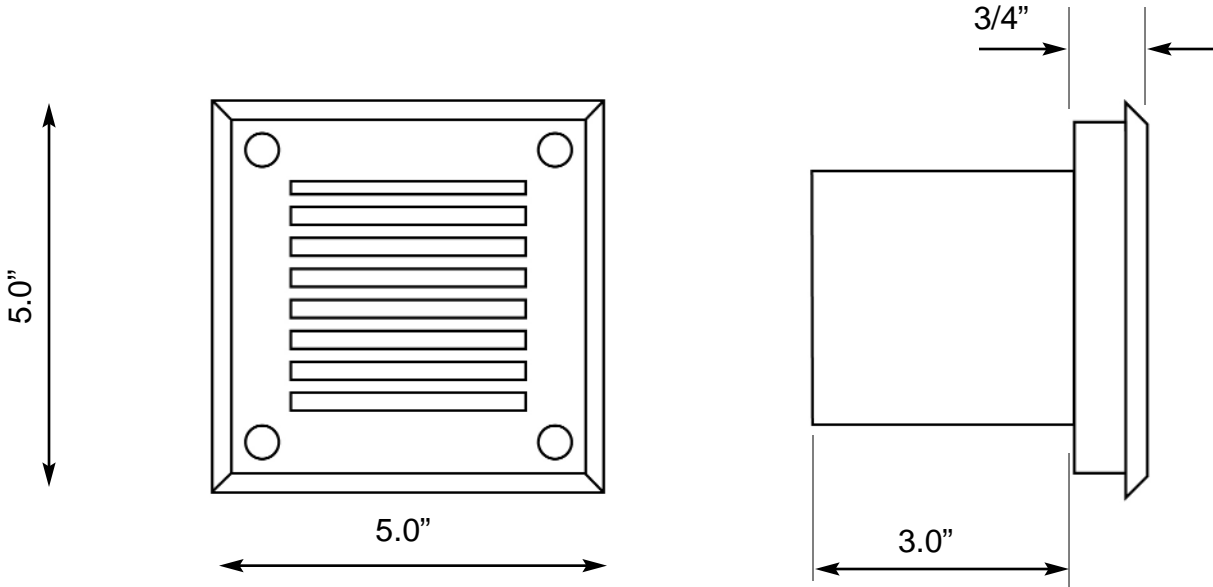

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux - SLR123

Lumux Lighting Inc	877-895-5552	Rev : A	Drawing Number SLR123
--------------------	--------------	---------	--------------------------

# LUMUX

Date :

Project :

Type:


Agency :

Distributor :

## ORDERING GUIDE:

---

SLR123 / XXX / XXX / xxx

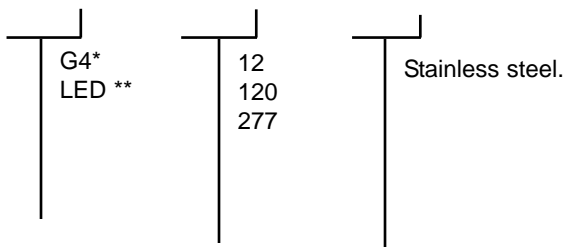

\* G4 could be specified with 12/120 or 277 volt transformer.

\*\* LED has integral driver @ 120 volt or 277 volt.

Lumux - SLR123

## PROJECT NOTES:

---

### Comments

### Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev :A

Drawing Number  
SLR123