

LUMUX

LIGHT COLUMN

BL344 TALL

The Lumux BL344 Tall is an elegant, architectural light column that excels at defining spaces, both in the day time and at night. It offers a distinctive contemporary yet minimalistic design and is ideal for illuminating large areas as well as path lighting. A powerful outdoor LED solution, the BL344 Tall offers high performance, while a frosty acrylic diffuser maximizes visual comfort and reduces glare. It is constructed from heavy-duty aluminum die-cast, providing long-lasting stability and durability that meets the highest standards.

Housing: Heavy-duty construction corrosion resistant, low-copper extruded aluminum. All fasteners are vandal resistant, stainless-steel.

Lens: Sealed one-piece, shatter proof, clear glass diffuser

Mounting: Secures with galvanized anchor bolts

Installation: Please refer to installation instructions

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F.

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: 64W

Color Temperature: 2700K / 3000K / 3500K / 4000K

Delivered Lumens: 2700K 3000K 3500K 4000K
2052Lm 2280Lm 2355Lm 2430Lm
Please consult factory for higher lumen packages

CRI: 90

Warranty: 5 year limited warranty

DATE:

PROJECT:


FIRM:

CATALOG NO.:

COMMENTS:



Dimensions:

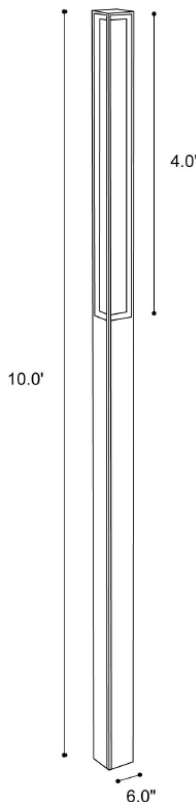

LUMUX

LIGHT COLUMN BL344 TALL

DATE: _____
 PROJECT: _____
 FIRM: _____
 CATALOG NO.: _____
 COMMENTS: _____


Ordering Guide:

Catalog No.	LED Color	Color Temp ¹	Voltage	Finish	Options ²
BL344 Tall	White	2700K	120/277	Black	<input type="checkbox"/> Occupancy Sensor <input type="checkbox"/> GFCI Switch
		3000K		White	
		3500K		Silver	
		4000K		Bronze	
				Custom RAL ²	

¹Consult factory for additional options
²Consult factory for additional pricing

Catalog No.: _____

Lighting Distribution Pattern:

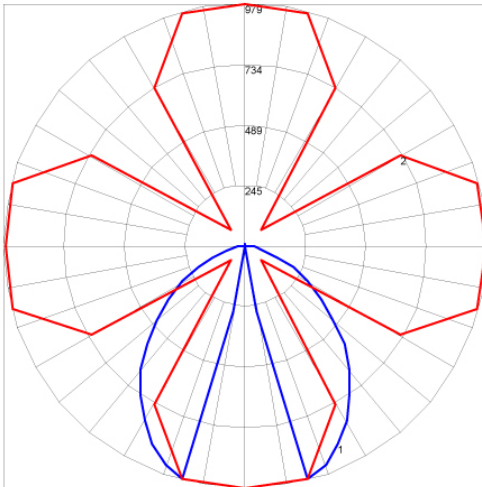


Maximum Candela = 978.68. Located At Horizontal Angle = 90. Vertical Angle = 15
 # 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (15) (Through Max. Cd.)

Post Detail:

Post: Fabricated from high grade aluminum extrusion conforms to ASTM-A-501-68 specifications. Meets or exceeds minimum yield strength of 46 PSI.

Anchorage: (4) anchor bolts fabricated from hot rolled steel bar. Minimum yield strength of 50 PSI. Bolts have "L" bend on one end and are threaded on the other end. Bolts are fully galvanized and are furnished with two nuts and two washers.

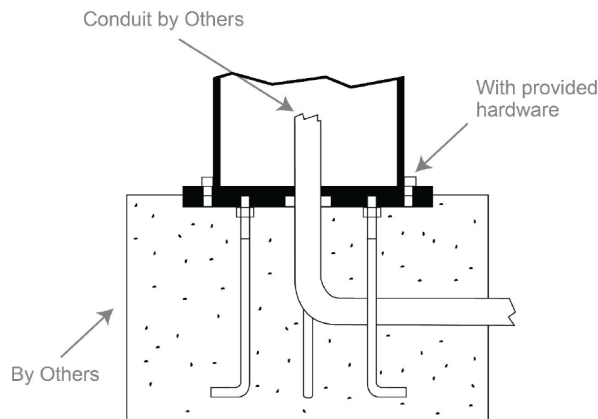

Content of specification sheet subject to change