

LUMUX

FLOOD LIGHTS

LF200 / LF300 / LF400 / LF800

The Lumux LF series is a family of precision engineered, heavy duty architectural LED linear flood lights used for wall washing applications. Constructed from extruded aluminum and the highest quality of specification grade materials and component parts, this fixture is designed for long lasting outdoor applications. It features a clear glass diffuser which provides protection from the elements. Offering high intensity and high lumen outputs, the Lumux LF is a powerful solution to illuminate building facades and landscape elements of all types. This fixture is offered in four sizes, 2ft (LF200) 3ft (LF300) 4ft (LF400) and 8ft (LF800).

Housing: Heavy-duty construction of corrosion resistant, low-copper aluminum die-cast. Enclosed lens secured with vandal resistant, stainless-steel screws.

Lens: 1/8" thick shatter proof polycarbonate diffuser, anodized aluminum reflector

Mounting: Wall, ceiling, or ground mounting

Installation: Unit installs on 1/2" NPT on each side of the fixture. Installation could be on wall, ceiling, or ground. Please refer to details A, B & C.

Finish: Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color.

Driver: Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

Gasket: Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

Protection Class: IP65, ETL Listed for wet locations

Wattage: LF200 (18W), LF300 (25W),
LF400 (52W), LF800 (104W)

Color Temperature: 2700K / 3000K / 3500K / 4000K

Delivered Lumens:

	2700K	3000K	3500K	4000K
LF200	1690Lm	1875Lm	2200Lm	2500Lm
LF300	2300Lm	2600Lm	3000Lm	3500Lm
LF400	3390Lm	3780Lm	4395Lm	5023Lm
LF800	6780Lm	7520Lm	8770Lm	10,026Lm

CRI: 90

Warranty: 5 year limited warranty

DATE: _____

PROJECT: _____


FIRM: _____

CATALOG NO.: _____

COMMENTS: _____



Dimensions:

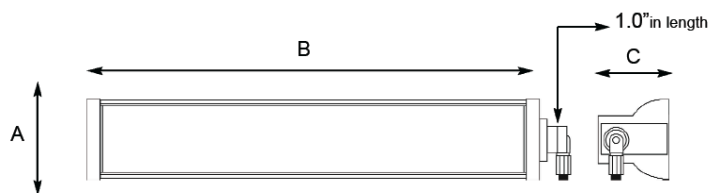

A = 4 5/8"
B = 24.0", 36.0", 48.0", 96.0".
(LF200, LF300, LF400 and LF800)
C = 5.0"

LUMUX

FLOOD LIGHTS

LF200 / LF300 / LF400 / LF800

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

Ordering Guide:


Catalog No.	LED Color	Color Temp ¹	Voltage	Finish	Options ²
LF200	White	2700K	120/277	Black	<input type="checkbox"/> Dimmable driver (0-10v)
LF300		3000K		White	
LF400		3500K		Silver	
LF800		4000K		Custom RAL ²	

¹Consult factory for additional options

²Consult factory for additional pricing


Catalog No.: _____

Accessories:

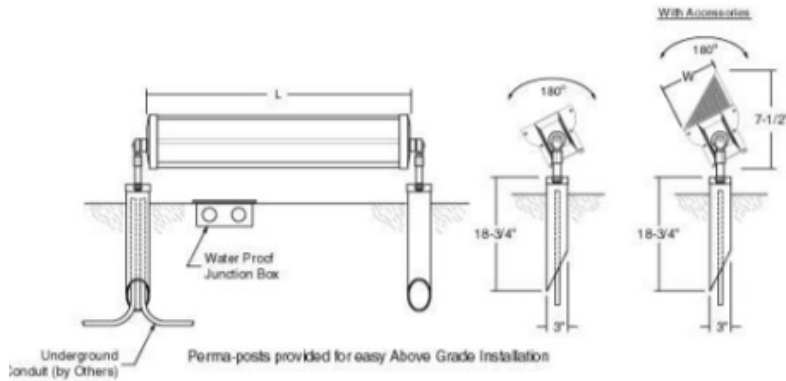


Details : A

<u>Item</u>	<u>Catalogue #</u>
Ground Perma post	Flood-Post-18
Wall Bracket 4.0"	Flood-Wall-4
Wall Bracket 10.0"	Flood-Wall-10
Glare Shield	Flood-GS

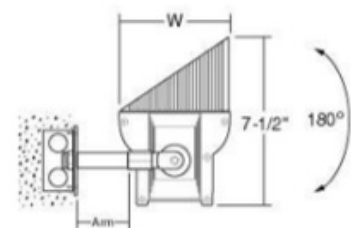

Details : B



Details : C