

# LUMUX

## STEP LIGHTS SL632V - SL632VSS

The Lumux SL600 series is a family of precision engineered, recessed LED architectural step lights that are designed for durability and performance. Constructed from the highest quality materials and components, this step light is offered in a wide array of form factors and grill options to fit any specification. A diecast aluminum body is seamlessly integrated with its faceplate, offered in die cast aluminum or grade 316 stainless-steel, with captive, vandal resistant stainless-steel screws. This step light features a frosty glass diffuser, reducing glare, and is energy efficient for long-lasting indoor and outdoor applications.

**Housing:** Heavy-duty construction of corrosion resistant, low-copper die cast aluminum. 45-degree angled louver faceplate secured with vandal resistant, stainless-steel screws.

**Lens:** 1/8" thick shatter-proof frosty glass diffuser

**Mounting:** Recessed wall or concrete pour box

**Mounting:** Recessed wall or optional concrete pour box

**Installation:** Unit is provided with galvanized steel concrete pour box (see diagram for dimensions). Housing provided with 1/2" conduit opening.

**Finish:** Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

**Driver:** Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

**Gasket:** Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

**Protection Class:** IP65, ETL Listed for wet locations

**Wattage:** 8W

**Color Temperature:** 2700K / 3000K / 3500K / 4000K

**Delivered Lumens:** 2700K 3000K 3500K 4000K  
40Lm 44Lm 50Lm 54Lm

**CRI:** 90

**Warranty:** 5 year limited warranty

DATE:

PROJECT:



FIRM:

CATALOG NO.:

COMMENTS:



### Dimensions:

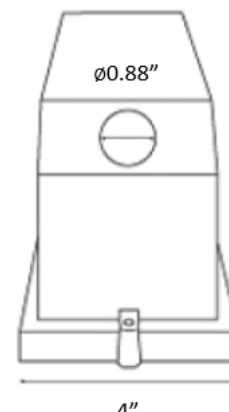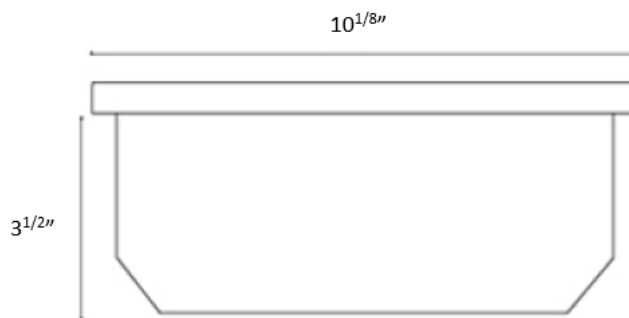

Content of specification sheet subject to change

# LUMUX

## STEP LIGHTS SL632V - SL632VSS

DATE: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 FIRM: \_\_\_\_\_  
 CATALOG NO.: \_\_\_\_\_  
 COMMENTS: \_\_\_\_\_


**Ordering Guide:**

Catalog No.	LED Color	Color Temp <sup>1</sup>	Voltage	Finish	Options <sup>2</sup>
SL632V	White	2700K	120/277	Black	<input type="checkbox"/> Dimmable driver (0-10v) <input type="checkbox"/> Concrete Pour Box
SL632VSS	Blue	3000K		White	
	Green	3500K		Silver	
	Red	4000K		Bronze	
	Amber			Custom RAL <sup>2</sup>	

<sup>1</sup> Color Temperature applies only to White LED Color  
<sup>2</sup> Consult factory for additional options  
 Consult factory for compact fluorescent options

Catalog No.: \_\_\_\_\_

**Photometrics:**

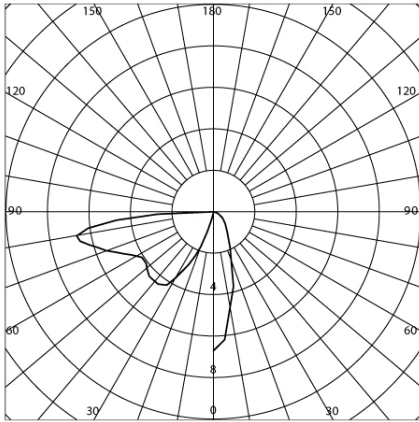

**Concrete Pour Box:**

