

# LUMUX

## WALL SCONCES

### WS700

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

The Lumux Wall Sconce ("WS") series combines architectural design and quality with high performance, and features a range of vandal resistant, wall and ceiling mounted luminaries with a variety of grill and visor options.

Designed for accent lighting of walls and facades, the Lumux WS series is constructed from the highest quality components and is built for optimal performance in any environment while offering elegant and attractive form factors.



**Housing:** Heavy-duty construction of one-piece, corrosion resistant, low-copper (<1% copper) die-cast aluminum. Enclosed lens secured with vandal resistant, stainless-steel screws. ADA Compliant.

**Lens:** One piece injection molded white opal, 1/8" thick, UV rated polycarbonate lens.

**Mounting:** Surface mounted, wall or ceiling

**Installation:** Mounting bracket provided that fits any standard 3.0" or 4.0" J-Box

**Finish:** Zinc polyester powder coat finish in black, white, silver, bronze, or any custom RAL color. Consult factory for marine grade or anti-microbial finish.

**Driver:** Constant current and universal input voltage 120/277V, starting temperature rated at -20°F. Dimmable option available (0-10v).

**Gasket:** Closed cell silicon foam gasket that seals out moisture, dust, and insects for weather tight operation.

**Protection Class:** IP65, ETL Listed for wet locations

**Wattage:** 21W

**Color Temperature:** 2700K / 3000K / 3500K / 4000K

**Delivered Lumens:** 2700K 3000K 3500K 4000K  
799Lm 866Lm 1010Lm 1154Lm


*Please consult factory for higher lumen packages*

**CRI:** 90

**Warranty:** 5 year limited warranty



#### Dimensions:

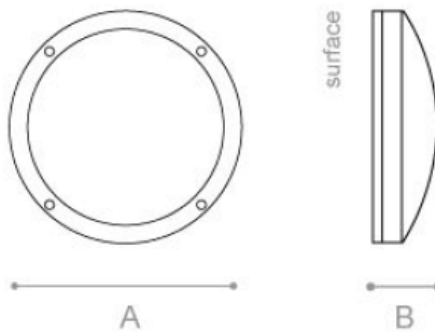

**Surface :**  
A : 10 5/8"  
B : 3 7/16"

# LUMUX

## WALL SCONCES

### WS700

DATE:

PROJECT:

FIRM:

CATALOG NO.:

COMMENTS:

#### Ordering Guide:

Catalog No.	LED Color	Color Temp <sup>1</sup>	Voltage	Finish	Options <sup>2</sup>
WS700	White	2700K	120/277	Black	<input type="checkbox"/> Dimmable driver (0-10v) <input type="checkbox"/> Photocell
	Amber	3000K		White	
		3500K		Silver	
		4000K		Bronze	
				Custom RAL <sup>2</sup>	

<sup>1</sup>Consult factory for additional options

<sup>2</sup>Consult factory for additional pricing

Consult factory for compact fluorescent options

Catalog No.: \_\_\_\_\_